

EU Type Examination Certificate

No. 0200-MID-04849

BX30 Check

AUTOMATIC CATCHWEIGHING INSTRUMENT

Issued by **FORCE Certification**
EU - Notified Body No. 0200

In accordance with the requirements in Directive 2014/32/EU of the European Parliament and Council.

Issued to **BAYKON Endüstriyel Kontrol Sistemleri San ve Tic A.S.**
Tuzla Kimya Sanayicileri OSB
Organik Caddesi 31
Tepeören, Tuzla
34956 Istanbul
TURKEY

In respect of An automatic check-/catchweighing instrument designated **BX30 Check** with variants of modules of load receptors, load cells and peripheral equipment.
Accuracy class XIII(1), Y(a), XIII(1), Y(b)
Weighing mode: Static
Maximum capacity, $Max = n \times e$
Verification scale interval: $e \geq 0.1 \text{ g}$
Number of verification scale intervals: $n \leq 10000$ per interval/range
(however, dependent on environment and the composition of the modules)
Variants of modules and conditions for the composition of the modules are set out in the annex.

The conformity with the essential requirements in Annex 1 and the specific requirements in Annex VIII (MI-006), chapter I & II of the Directive 2014/32/EU is met by the application of OIML R51:2006, OIML D11:2013 and WELMEC Guide 7.2:2018.

The principal characteristics and approval conditions are set out in the descriptive annex to this certificate.

The annex comprises 12 pages.

Issued on **2019-01-08**
Valid until **2029-01-08**

FORCE Certification references:

Task no.: 118-30741.90.20 and ID no.: 0200-MID-04849

Signatory: J. Hovgård Jensen

Descriptive annex

Contents	Page
1. Name and type of instrument	2
2. Description of the construction and function	2
2.1 Construction	2
2.2 Function	3
3. Technical data	4
3.1 BX30 Check – Automatic check-/catchweighing instrument	4
3.2 Indicator	5
3.3 Load cells	5
3.4 Load receptors	6
3.5 Composition of modules	6
3.6 Documents	6
4. Interfaces and peripheral equipment	6
4.1 Interfaces	6
4.2 Peripheral equipment	7
5. Approval conditions	7
5.1 Compatibility of modules	7
6. Special conditions for verification	7
6.1 Approval parameter 511 shall be set to OIML	7
6.2 Composition of modules	7
7. Securing and location of seals and verification marks	7
7.1 Securing and sealing	7
8. Location of CE mark of conformity and inscriptions	8
8.1 Scale	8
9. Pictures	9
10. Composition of modules – an example	12

1. Name and type of instrument

The automatic weighing instrument designated BX30 Check is a static weighing automatic check-/catchweighing instrument consisting of an electronic weighing indicator connected to a separate load receptor and peripheral equipment such as printers or other devices, as appropriate.

The BX30 Check indicator is equipped with a display board and a main board which includes some of the interfaces and serves as motherboard for different piggyback boards such as ADC circuitry, digital load cell interface and more interfaces including the fieldbus options.

The name of the instrument may be followed by alphanumeric characters for technical, legal or commercial characterization of the instrument.

The modules appear from the sections 3.1, 3.2, 3.3 and 3.4; the principle of the composition of the modules is set out in the sections 6.1 and 10.

2. Description of the construction and function

2.1 Construction

2.1.1 BX30 Check weighing indicator

The weighing indicator of the BX30 Check automatic check-/catchweighing instrument scale is Baykon's indicator type BX30 Check.

The indicator consists of analogue to digital conversion, microprocessor control circuitry, power supply, keyboard, non-volatile memory for storage of calibration and weight data, option boards and a weight display contained within a single enclosure.

The BX30 Check indicator is housed in an enclosure with body made of aluminium and front made of stainless steel.

The front panels of the indicator comprise of:

- LCD display with backlight having appropriate state indicators, one line alphanumeric information digits and 6 bigger numeric digits for weight indication.
- A keyboard containing 21 keys used to enter commands or data in-to the weight indicator. Each key is identified with a name and/or pictograph.

BX30 Check has 16 keys for entering commands and alphanumeric characters, plus arrow keys for navigating in the menu.

The BX30 Check indicator is equipped with a display board and a main board which includes some of the interfaces and serves as motherboard for different piggyback boards such as ADC circuitry, digital load cell interface and more interfaces including the fieldbus options.

Alibi memory data is saved at a SD-card under the mainboard of the BX30 Check. The second SD card is used to store the data, to activate some features like Modbus RTU etc.

The module is specified in Section 3.2.

2.1.2 Load cells

Set out in Section 3.3.

2.1.3 Load receptor

Set out in Section 3.4.

2.1.4 Interfaces and peripheral equipment

Set out in Section 4.

2.2 Function

The weight indicating instruments are microcontroller based electronic weight indicators that require the external connection of strain gauge load cell(s) or digital load cell(s). The weight information appears in the digital display located on the front panel and may be transmitted to peripheral equipment for recording, processing or displaying.

The indicator can be configured to show the weight in either g, kg, or t (metric ton).

The main functions are described below.

2.2.1 Functions and devices

The automatic weighing instrument has the following permitted functions and devices that are subject to the Measuring Instrument Directive:

- Power up test
- Initial zero setting device (max. 20 % of Max)
- Semiautomatic zero setting device (max 4 % of Max)
- Zero tracking device (max 4 % of Max)
- Automatic zero setting device (max 4 % of Max)
- Detection and indication of zero and of equilibrium
- Automatic subtractive tare device
- Automatic additive tare device
- Preset tare device
- Printing device
- Data storage device (alibi memory)
- Gravity compensation device
- Stop mode (for check and verification purpose)
- Detection of significant fault

2.2.2 Software

The software versions of the BX30 Check weighing indicator are displayed at start-up.

The software version of the BX30 Check is 01.XX, where XX is a sub-revision numbers for software changes not related to the legal functionality of the software.

3. Technical data

The automatic weighing instruments and its modules are set out as follows:

3.1 BX30 Check – Automatic check-/catchweighing instrument

Type:	BX30 Check
Accuracy class:	XIII(1), Y(a), XIII(1), Y(b)
Weighing mode:	Static
Maximum capacity (Max):	= $n \times d$
Minimum capacity (Min):	$\geq 20e$
Verification scale interval (e=):	$\geq 0.1 \text{ g}$
Weighing range:	Single-interval / multi-range / multi-interval
Number of Verification Scale Intervals (n):	≤ 10000 per interval / range
Maximum subtractive tare:	-Max
Maximum additive tare:	depend on modular compatibility configuration
Maximum time between automatic zero-setting:	37 minutes for $0.7 \mu\text{V} > e \geq 0.4 \mu\text{V}$ 75 minutes for $e \geq 0.7 \mu\text{V}$
Extra warm-up time ¹⁾ :	23 minutes for $0.7 \mu\text{V} > e \geq 0.4 \mu\text{V}$ 2 minutes for $1.0 \mu\text{V} > e \geq 0.7 \mu\text{V}$ None for $e \geq 1.0 \mu\text{V}$
Temperature range:	-10° to 40° C
Electromagnetic class:	E2
Humidity:	Non-condensing

¹⁾ *After power on automatic operation shall be disabled for this time.*

3.2 Indicator

The indicator has the following characteristics:

Type:	BX30 Check
Weighing range:	Single interval / multi-range / multi-interval
Maximum number of Verification Scale intervals:	≤ 10000 per interval/range
Fractional factor:	$p_i = 0.5$
Verification scale interval (d =):	$\geq 0.4 \mu\text{V}$
Excitation voltage:	5 VDC
Circuit for remote sense:	Active
Minimum input impedance:	43 ohm
Maximum input impedance:	1200 ohm
Internal resolution:	Up to 8,000,000 counts
Operating temperature range:	-10° C to +40° C
Mains power supply:	12-28 VDC, not to be supplied from DC Mains
Maximum cable length between indicator and junction box for load cells:	9840 m/mm ²
Peripheral interface:	Set out in section 4

3.3 Load cells

3.3.1 General acceptance of load cells

Any analogue load cell(s) may be used for instruments under this certificate of type approval provided the following conditions are met:

- 1) There is a respective Part / Evaluation / Test Certificate (EN 45501) or an OIML Certificate of Conformity (R60:2000 or R60:2017) issued for the load cell by a Notified Body responsible for type examination under Directive 2014/31/EU.
- 2) The certificate contains the load cell types and the necessary load cell data required for the manufacturer's declaration of compatibility of modules (WELMEC 2:2015), and any particular installation requirements). A load cell marked NH is allowed only if humidity testing to EN 45501 has been conducted on this load cell.
- 3) The compatibility of load cells and indicator is established by the manufacturer by means of the compatibility of modules form, contained in the above WELMEC 2 document, or the like, at the time of EC verification or declaration of EC conformity of type.
- 4) The load transmission must conform to one of the examples shown in the WELMEC 2.4 Guide for load cells.

3.4 Load receptors

Movable platforms shall be equipped with level indicators.

3.4.1 Platforms

Construction in brief	All-steel, aluminium, plastic, steel-reinforced concrete construction or hybrid construction of these materials. Bench, surface, pit or wall mounted.
Reduction ratio	1
Junction box	Mounted in, on or near the platform.
Load cells	Any R60 certified load cell according to section 3.3.1.
Drawings	Various.

3.4.2 Bin, tank, hopper and hanging load receptors

Construction in brief	Load cell assemblies each consisting of a load cell stand assembly to support one of the mounting feet bin, tank, conveyor or hanging etc.
Reduction ratio	1
Junction box	Mounted in, on or near the dead load.
Load cell	Any R60 certified load cell according to section 3.3.1.
Drawings	Various.

3.5 Composition of modules

For composition of modules EN 45501:2015 annex F shall be satisfied.

3.6 Documents

The documents filed at FORCE (reference No. 118-30741) are valid for the weighing instruments described here.

4. Interfaces and peripheral equipment

4.1 Interfaces

The interfaces are characterised “Protective interfaces” according to paragraph 8.1 in annex I of the Directive.

The indicator is equipped with the following communication and I/O interfaces,

- 2 RS-232
- RS485
- RS422
- USB
- Ethernet
- Optional: Analog and/or digital input/outputs
- Optional: Modbus RTU, Modbus TCP, CanOpen, Ethernet, EthernetIP, Profinet, Profibus, Ethercat, CClink, Powerlink, CC-Link IE
- Optional: Bluetooth or WiFi.

4.2 Peripheral equipment

The instrument may be connected to any simple peripheral device with a CE mark of conformity. Connection between the indicator and peripheral equipment is allowed by screened cable.

5. Approval conditions

5.1 Compatibility of modules

For composition of modules EN 45501:2015 annex F shall be satisfied for maximum additive tare effect.

6. Special conditions for verification

6.1 Approval parameter 511 shall be set to OIML

The parameter related with approval, which is coded as 511, shall be selected as OIML.

6.2 Composition of modules

The environmental conditions should be taken into consideration by the composition of modules for a complete weighing instrument, for example instruments with load receptors placed outdoors and having no special protection against the weather.

The composition of modules shall agree with section 5.1.

7. Securing and location of seals and verification marks

7.1 Securing and sealing

Seals shall bear the verification mark of a notified body or alternative mark of the manufacturer according to ANNEX II, module F or D of Directive 2014/32/EU.

7.1.1 Indicator

Access to the configuration and calibration facility requires that a calibration switch is in position ON.

The switch is positioned on the main board and accessible through a hole at the rear of the indicator. This hole is sealable by a sticker.

Sealing of the indicator against opening - to prevent access to the calibration switch and to secure the electronics against dismantling/adjustment - and sealing of load cell connection are accomplished with either wire and seal or using brittle stickers.

7.1.2 Indicator - load cell connector - load receptor

Securing of the indicator, load receptor and load cell combined is done the following way:

- The load cell connector is positioned next to the calibration switch on the mainboard and therefore secured by the same cover using brittle stickers or by wire and seal.

In special cases where the place of installation makes it impossible to use the above sealing:

- Inserting the serial number of the load receptor as part of the principal inscriptions contained on the indicator identification label.
- The load receptor bears the serial number of the indicator on its data plate.

7.1.3 Junction box for load cells

Access to the junction box for analogue load cells, if any, is prevented by the use of lead wire seals or by sealing it with brittle plastic stickers.

8. Location of CE mark of conformity and inscriptions

8.1 Scale

8.1.1 CE mark

CE mark and supplementary metrological marking shall be applied to the scale according to article 20 of Directive 2014/32/EU.

8.1.2 Inscriptions

Max, Min, and e= shall be located near the display(s).

On the inscription plate of the instrument:

- Manufacturer's name and/or trademark
- Postal address of manufacturer
- Type designation
- Serial number
- Product(s) designation
- Reference class
- Accuracy class
- Max, Min, e =
- Temperature range: -10 / +40 °C (optional)
- Electromagnetic class: E2
- Humidity: Non-condensing
- EU type examination certificate number
- Supply voltage
- Pneumatic/hydraulic pressure (if applicable)
- Maximum additive tare
- Maximum subtractive tare

9. Pictures



Figure 1 BX30 Check indicator.

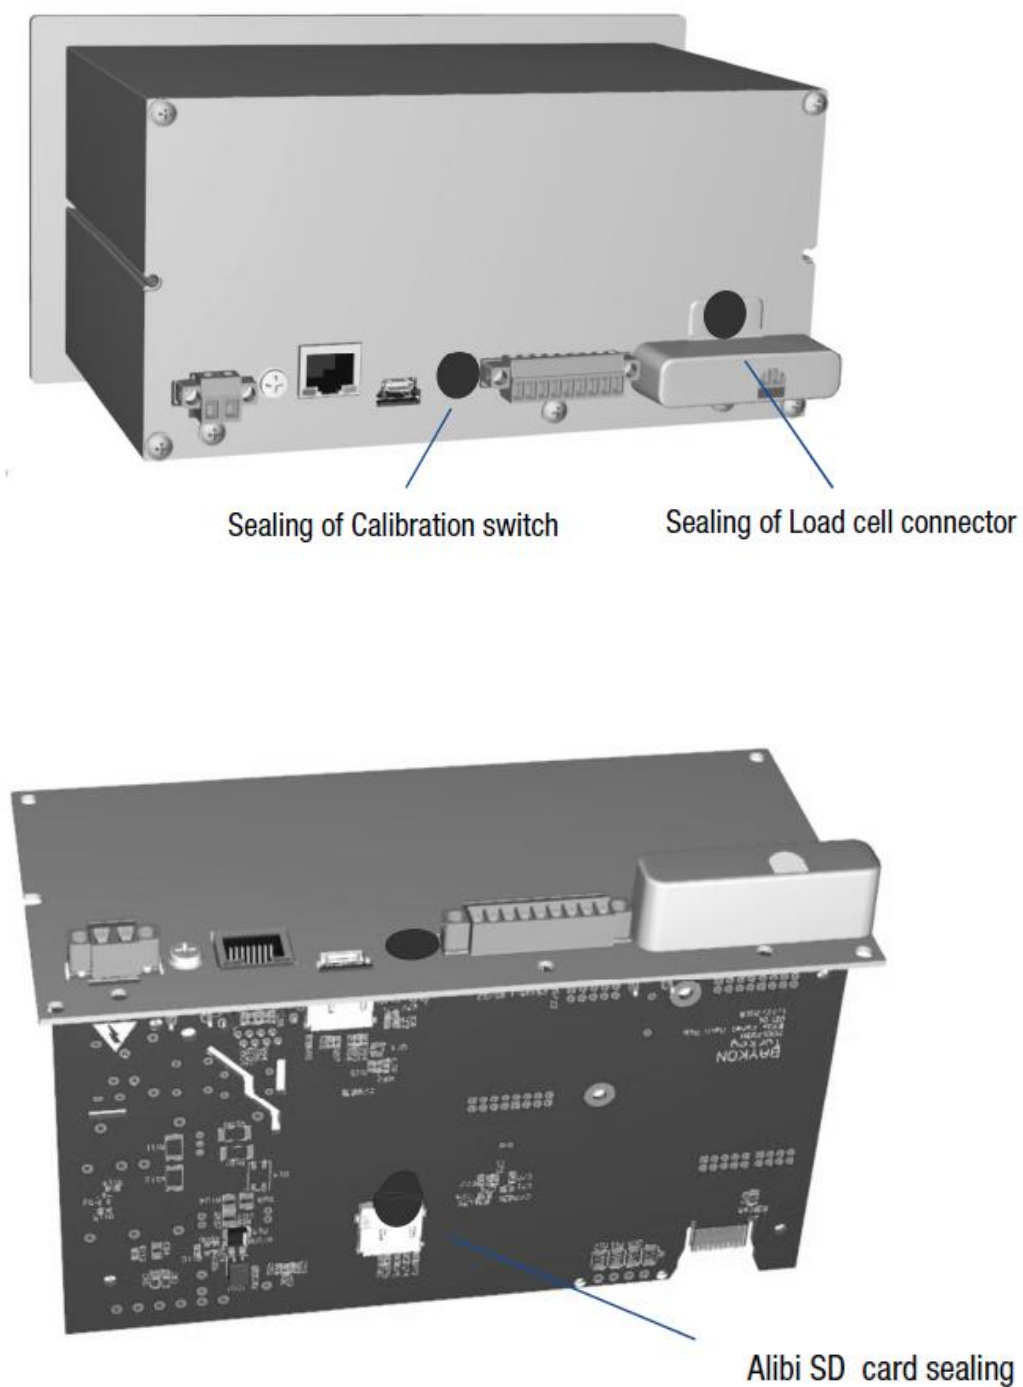


Figure 2 Sealing of BX30 Check indicator with brittle sticker.



Figure 3 Example of a BX30 Check - automatic check-/catchweighing instrument.

10. Composition of modules – an example

COMPATIBILITY OF MODULES

Ref.: WELMEC 2

Non-Automatic Weighing Instrument, single-interval.

Certificate of EU Type-Approval N°:

TAC: 0200-MID-04849

INDICATOR

A/D (Module 1)

Type: BX30 Check

Accuracy class according to EN 45501 and OIML R76:
 Maximum number of verification scale intervals (n_{max}):
 Fraction of maximum permissible error (mpe):
 Load cell excitation voltage:
 Minimum input-voltage per verification scale interval:
 Minimum load cell impedance:
 Coefficient of temperature of the span error:
 Coefficient of resistance for the wires in the J-box cable:
 Specific J-box cable-Length to the junction box for load cells:
 Load cell interface:
 Additive tare, if available:
 Initial zero setting range:
 Temperature range:
 Test report (TR), Test Certificate (TC) or OIML Certificate of Conformity:

Class _{ind} (I, II, III or IIII)	III
n_{ind}	10000
p_1	0,5
U_{exc} [Vdc]	5
ΔU_{min} [μ V]	0,4
R_{Lmin} [Ω]	43
E_s [% / 25°C]	
S_x [% / Ω]	
$(L/A)_{max}$ [m / mm ²]	9840
6-wire (remote sense)	
T^+ [% of Max]	100
IZSR [% of Max]	-10 / 10
T_{min} / T_{max} [°C]	-10 / 40

LOAD RECEPTOR

(Module 2)

Type: Platform

Construction:
 Fraction of mpe:
 Number of load cells:
 Reduction ratio of the load transmitting device:
 Dead load of load receptor:
 Non uniform distribution of the load:
 Correction factor:

p_2	0,5
N	1
$R = F_M / F_L$	1
DL [% of Max]	20
NUD [% of Max]	0
$Q = 1 + (DL + T^+ + IZSR^+ + NUD) / 100$	2,3

LOAD CELL

ANALOG (Module 3)

Type: Tedeia Huntleigh 1042

Accuracy class according to OIML R60:
 Maximum number of load cell intervals:
 Fraction of mpe:
 Rated output (sensitivity):
 Input resistance of single load cell:
 Minimum load cell verification interval: ($v_{min\%} = 100 / Y$)
 Rated capacity:
 Minimum dead load, relative:
 Temperature range:
 Test report (TR) or Test Certificate (TC/OIML) as appropriate:

Class _{LC} (A, B, C or D)	C
n_{LC}	3000
p_3	0,7
C [mV / V]	2
R_{LC} [Ω]	415
$v_{min\%}$ [% of E _{max}]	0,00666
E_{max} [kg]	10
$(E_{min} / E_{max}) * 100$ [%]	0
T_{min} / T_{max} [°C]	-10 / 40

COMPLETE WEIGHING INSTRUMENT

Single-interval

Manufacturer: Baykon

Type: BX30 Check

Accuracy class according to EN 45501 and OIML R76:
 Fractions: $p_1 = p_1^2 + p_2^2 + p_3^2$:
 Maximum capacity:
 Number of verification scale intervals:
 Verification scale interval:
 Utilisation ratio of the load cell:
 Input voltage (from the load cells):
 Cross-section of each wire in the J-box cable:
 J-box cable-Length:
 Temperature range to be marked on the instrument: Not required
 Peripheral Equipment subject to legal control:

Class _{WI} (I, II, III or IIII)	III
p_1	1,0
Max [kg]	3
n	3000
e [kg]	0,001
$\alpha = (Max / E_{max}) * (R / N)$	0,30
$\Delta U = C * U_{exc} * \alpha * 1000 / n$	1,00
A [mm ²]	0,22
L [m]	2
T_{min} / T_{max} [°C]	

Acceptance criteria for compatibility			Passed, provided no result below is < 0		
Class _{WI}	<=	Class _{ind} & Class _{LC} (WELMEC 2: 1)	Class _{WI}	:	PASSED
π	<=	1 (R76: 3.5.4.1)	1 - π	=	0,0
n	<=	n_{max} for the class (R76: 3.2)	n_{max} for the class - n	=	7000
n	<=	n_{ind} (WELMEC 2: 4)	$n_{ind} - n$	=	7000
n	<=	n_{LC} (R76: 4.12.2)	$n_{LC} - n$	=	0
E_{min}	<=	DL * R / N (WELMEC 2: 6d)	(DL * R / N) - E_{min}	=	0,6
$v_{min} * \sqrt{N} / R$	<=	e (R76: 4.12.3)	e - ($v_{min} * \sqrt{N} / R$)	=	0,000
or (if v_{min} is not given)			Alternative solutions:		$\uparrow \downarrow$
$(E_{max} / n_{LC}) * (\sqrt{N} / R)$	<=	e (WELMEC 2: 7)	e - $((E_{max} / n_{LC}) * (\sqrt{N} / R))$	=	
ΔU_{min}	<=	ΔU (WELMEC 2: 8)	$\Delta U - \Delta U_{min}$	=	0,60
R_{Lmin}	<=	R_{LC} / N (WELMEC 2: 9)	$(R_{LC} / N) - R_{Lmin}$	=	372
L / A	<=	$(L / A)_{max}^{WI}$ (WELMEC 2: 10)	$(L / A)_{max}^{WI} - (L / A)$	=	9833
T_{range}	<=	$T_{max} - T_{min}$ (R76: 3.9.2.2)	$(T_{max} - T_{min}) - T_{range}$	=	20
$Q * Max * R / N$	<=	E_{max} (R76: 4.12.1)	$E_{max} - (Q * Max * R / N)$	=	3,1

Signature and date:

Conclusion PASSED

 This is an authentic document made from the program:
 "Compatibility of NAWI-modules version 3.2".